


# PRODUCT SUBMITTAL

# SGFC-102

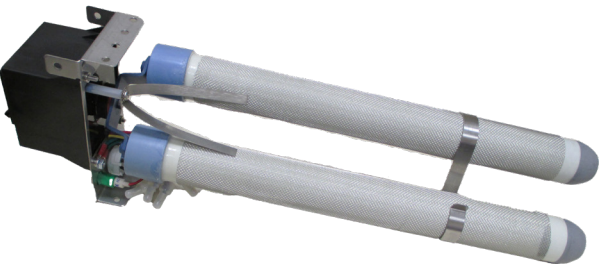


## APPLICATION

The AtmosAir FC-102 ionization system is intended to be mounted in the supply discharge in smaller air handling systems such as fan coils, heat pumps, RTU's, and other unitary type systems.

The system can be integrated on an OEM basis, or a retrofit package is also available. The unit will be calibrated at the factory per AtmosAir recommendations or the contractor will calibrate the ionization setting to attain ion level readings of between 350 and 1,500 negative ions/cm<sup>3</sup> in the space.

Figure 1

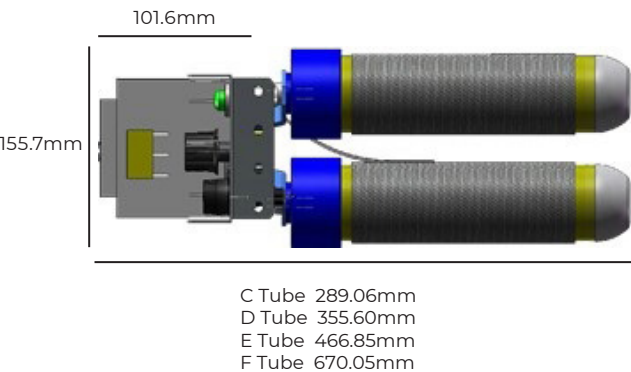

## SPECIFICATIONS

General Product Information	
Air Flow Rating	Up to 8,500 CMH
Pressure Drop	Minimal
Housing Material	22 Gauge Stainless Steel w/ Integral Universal Mounting Bracket
Weight	2.04 kg
Max Operation Temp.	65.6°C
Electrical	
Voltage	120 or 240 VAC
Frequency	50/60 Hz
Power Consumption	6 Watts
Current Draw	0.4 Amps
Fuse	1.25 Amp 120 VAC   1.0 Amp 240 VAC
Field Electrical Connection	Junction Box Integrated into AHU
Ionization Tube	
Material	Multi-Core Composite
Number	Two (2)
Size	C (177.8mm) D (243.8mm) E (355.6mm) F (558.8mm)
Tube Life	17,600 Hours (Two Years)
Options	Air Switch, 6.35mm Four Point Mount Bracket: Horizontal, 'S' Clip for F Tube Stabilization
Dimensions	
See Figure 1 & 2	

Figure 2

