
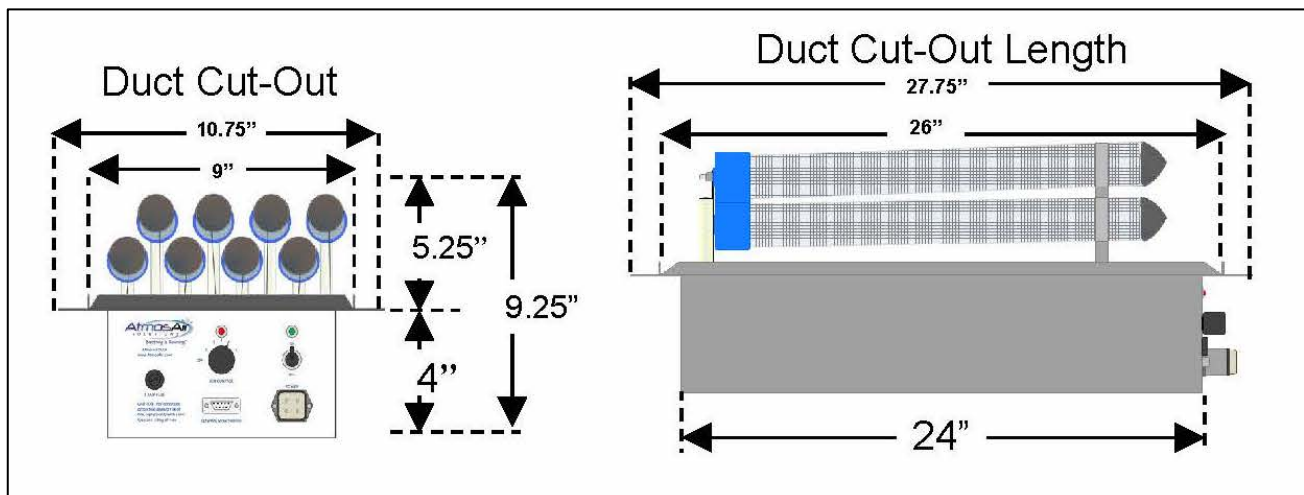


APPLICATION

The ProMedUSA+AtmosAir SG508 Series bi-polar ionization system is designed for mounting in the supply duct or air handler of a heating, cooling or ventilating system. Ionization output can be adjusted with a 5 step knob to precisely tune the output to your requirements.

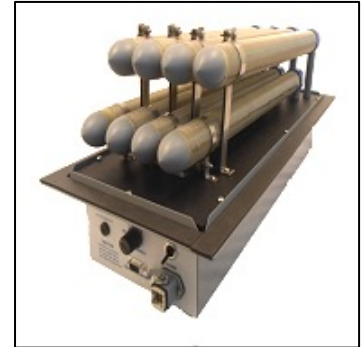

SPECIFICATIONS

- | | |
|------------------------|--------------------------------------|
| • Air Flow Capacity: | Up to 25,000 CMH |
| • Pressure Drop: | Virtually NIL |
| • Weight: | 10 KG |
| • Housing Material: | 22 gauge powder coated steel |
| • Maximum Temperature: | 65°C |
| • Input Voltage: | 120-240VAV, 50/60Hz, 50 Watts |
| • Number of tubes: | Up to 8 Tubes |
| • Ionization Tube: | Multi-core Composite Stainless Steel |
| • AtmosAir Tube Size: | 534mm |
| • Rated Tube Life | 17,600 hours (approx. 2+years) |
| • UL Approvals | UL1995, 867; file #313742 |
| • Other Approvals | Energy Star, Green Seal Pending |